




大针距、布料识别、带语音
Large needle pitch, fabric detection, with voice

B9500 系列/series

超高速智慧包缝机
ULTRA HIGH-SPEED INTELLIGENT OVERLOCK SEWING MACHINE

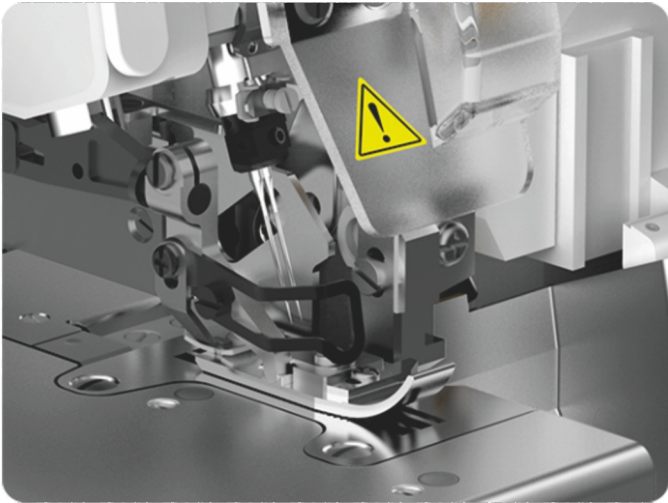


自动剪线抬压脚功能
Auto thread trimming presser foot lift



全新触屏
New touch screen



语音导航，一键还原功能
Voice Guidance, One-key Reset

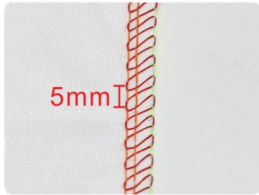

大针距设计提升送料效率
Large needle guage design,
improve feeding efficiency




缝料智能识别，操作简便适应广
Intelligent identification of seam material,
easy operation and wide adaptability


线迹展示 Stitch display




B9500-38
五线中厚料
Five-threads,
medium heavy
material

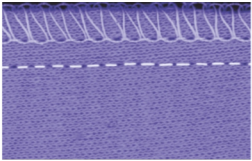

B9500-86
五线厚料
Five-threads
heavy material

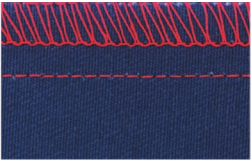


B9500-70
五线宽边
Five-threads
wide gauge

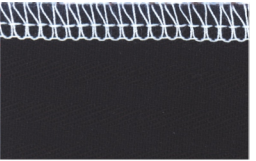

B9500-13
四线包缝
Four-threads



B9500-13H
四线厚料
Four-threads,
heavy material

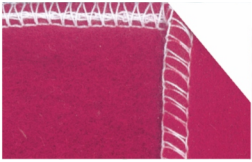

B9500-180
三线倒回缝
Three-threads
back latching sewing



B9500-17
三线包缝
Three-threads
overlock sewing
machine



B9500-16S2
三线窄边
Three-threads,
narrow edge

B9500-17-*	DCX27 11#	1	3	0	4	0.5-3.8	0.7-2	5.5	6500
B9500-16S2-*	DCX27 11#	1	3	0	1.5	0.5-3.8	0.7-2	5.5	6500
B9500-13-*	DCX27 11#	2	4	2	2+4	0.7-4.5	0.7-1.5	5.5	6500
B9500-13H-*	DCX27 11#	2	4	2	2+4	0.5-3.8	0.7-2	5.5	6500
B9500-13-SD3	DCX27 11#	2	4	2	2+4	0.7-4.5	0.7-1.5	5.5	6500
B9500-02×250-*	DCX27 11#	2	4	5	5+4	0.5-3.8	0.7-2	5.5	6500
B9500-38-*	DCX27 14#	2	5	3	3+4	0.5-3.8	0.7-2	5.5	6500
B9500-38-SD3	DCX27 14#	2	5	3	3+4	0.5-3.8	0.7-2	5.5	6500
B9500-70-*	DCX27 14#	2	5	5	5+5	0.5-3.8	0.7-2	5.5	6500
B9500-86-*	DCX27 21#	2	5	5	5+6	0.7-4.5	0.7-1.5	7	6500
B9500-180	DCX27 11#	1	3	0	4	0.5-3.8	0.7-2	5.5	6500
B9500-181	DCX27 11#	2	4	2	2+4	0.5-3.8	0.7-2	5.5	6500
B9500-355-*	DCX27 11#	3	6	5	5+2+4	0.5-3.8	0.7-2	5.5	6500
B9500-365-*	DCX27 21#	3	6	5	5+3+3	0.7-5	0.7-1.4	7	6000

13: 四线普通缝, 17: 三线普通缝, 16S2: 三线窄边缝, 13H: 四线厚料包缝, 180: 三线倒回缝, 181: 四线倒回缝, 02×250: 双链线迹缝, 38: 五线普通缝, 70: 五线宽边缝, 86: 五线极厚料包缝, 355: 六线普通缝, 365: 六线厚料缝。

SD3: 侧吸风剪线三自动

★ 代表可选配ED单抬压脚, ED2电动二自动(剪线+抬压脚), ED3电动三自动(剪线+抬压脚+气动吸气), PD3气动三自动(剪线+抬压脚+气动吸气), 缺省: 无自动功能。

13: Four-thread regular stitching, 17: Three-thread regular stitching, 16S2: Three-thread narrow edge stitching, 13H: Four-thread thick material overlock stitching, 180: Three-thread reverse stitching, 181: Four-thread reverse stitching, 02×250: Double chain stitch, 38: Five-thread regular stitching, 70: Five-thread wide edge stitching, 86: Five-thread extra thick material overlock stitching, 355: Six-thread regular stitching, 365: Six-thread thick material stitching

SD3: Side air suction thread trimming with three-automatic functions

The asterisk (*) indicates optional configurations: ED: Single automatic presser foot lifting, ED2: Electric two-automatic functions (thread trimming + presser foot lifting), ED3: Electric three-automatic functions (thread trimming + presser foot lifting + electric air suction), PD3: Pneumatic three-automatic functions (thread trimming + presser foot lifting + pneumatic air suction), Default: No automatic functions